

MORE SAFETY MORE POWER



**TSUNESS Headquarter**

www.tsun-ess.com  
+86 512 6618 6028  
sales@tsun-ess.com  
2nd Floor, Building 2, No. 55 Aigehao Road, Weitang Town, Xiangcheng District, Suzhou City, Jiangsu Province, China

**TSUNESS Europe GmbH**

de.tsun-ess.com  
sales@tsun-ess.com / service\_DE@tsun-ess.com  
Friedrich-Ebert-Anlage 36, 60325 Frankfurt am Main, Germany

updated on 19th Apr, 2024



# EASY SOLAR KIT Balcony Air Angled

TSOL-ESK400-Air (A)  
TSOL-ESK800-Air (A)



Product  
Warranty

Applicable for  
Sleek Design and Seamless  
Integration with the  
**Balcony**



Lightweight



Highly Waterproof



Wind-resistant



Plug & Play



All-in-one Design



Easier Installation



Built-in WiFi,  
APP Remote Monitoring



Output Power 400W/800W  
Can be Adjusted According to  
Local Regulations

TSUNESS Co., Ltd  
sales@tsun-ess.com www.tsun-ess.com +86-512-66186028

## Technical Data

Model	TSOL-ESK400-Air (A)	TSOL-ESK800-Air (A)
<b>PV Module Parameter *</b>		
Module Power(Pmpp @STC)	200*2	200*4
Max. Module Efficiency	20.4%	20.4%
Temp. Coef. (Power)	-0.36%/°C	-0.36%/°C
Color	Black	Black
<b>AC Output Parameter</b>		
Max. System Continuous Output Power (W)**	400	800
Max. Output Current (A)	2	4
Nominal Output Voltage (V)***	220/230/240	
Nominal Frequency (Hz)***	50/60	
Power Factor	>0.99	
Output Current Harmonic Distortion	<3%	
Length of AC End Cable***	5m (10m, 15m optional)	
<b>Certification</b>		
Solar Module	CE,TUV,UL,CQC,IEC 61215,IEC 61730	
Microinverter	CE-LVD,CE-EMC,CE-RED,VDE 4105,EN 50549-1	
Bracket	EN 10204:2017, EN 1090-1:2009+A1: 2011	
<b>Environmental Parameter</b>		
Environmental Protection Rating	IP67	
Operating Ambient Temperature Range	-25 °C to 65 °C	
Relative Humidity	0-100%	
Max. Operating Altitude Without Derating [m]	2000	
<b>Mechanical Parameter</b>		
Weight [kg]	2x5	4x5
Dimensions (W×H×D mm)	2x(1270*900*500)	4x(1270*900*500)
Warranty	12 years	

\* The colour , brand and power of the solar module can be customized if the PV module is compatible to ESK system.


\*\* The output power of the system can be limited to 300W(ESK400) or 600W(ESK800).

\*\*\* The AC voltage , frequency range and plug type may vary depending on specific country grid.


## Ordering Information

Model		
Balcony Air Vertical	TSOL-ESK400-Air (A)	TSUNESS ESK Balcony Air Angled (200W Light panel*2, micro inverter MS400, end cable 5m and plug)
Balcony Air Vertical	TSOL-ESK800-Air (A)	TSUNESS ESK Balcony Air Angled (200W Full black panel*4, micro inverter MS800, end cable 5m and plug)


## Standard Configuration

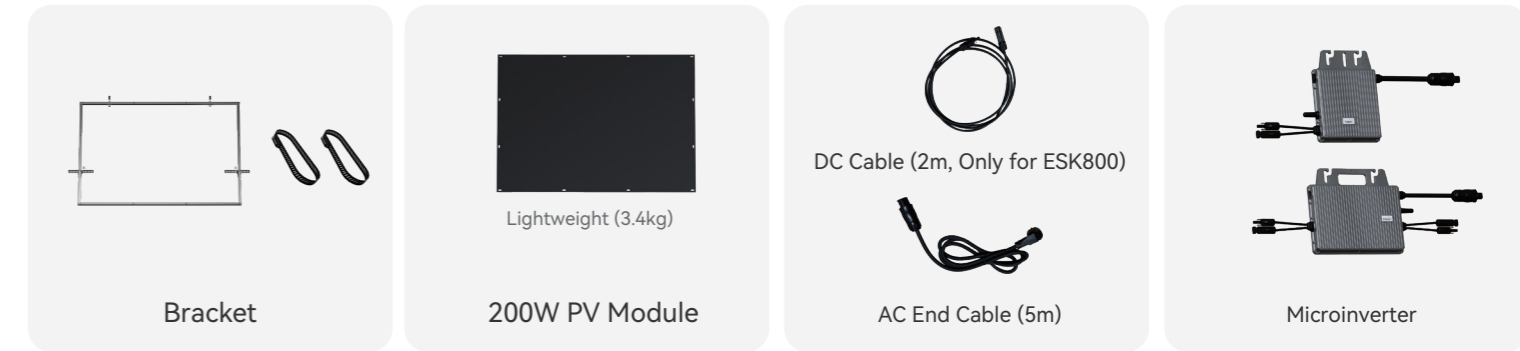

## System Diagram

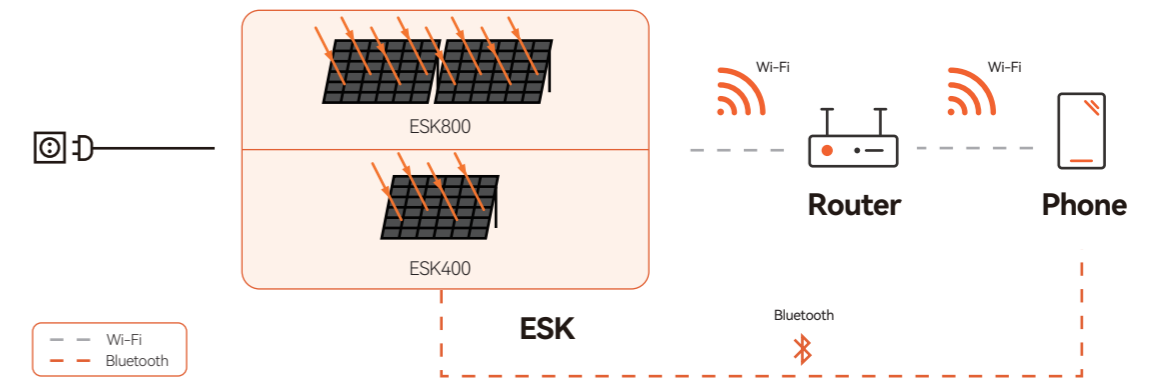

## Monitoring Platform

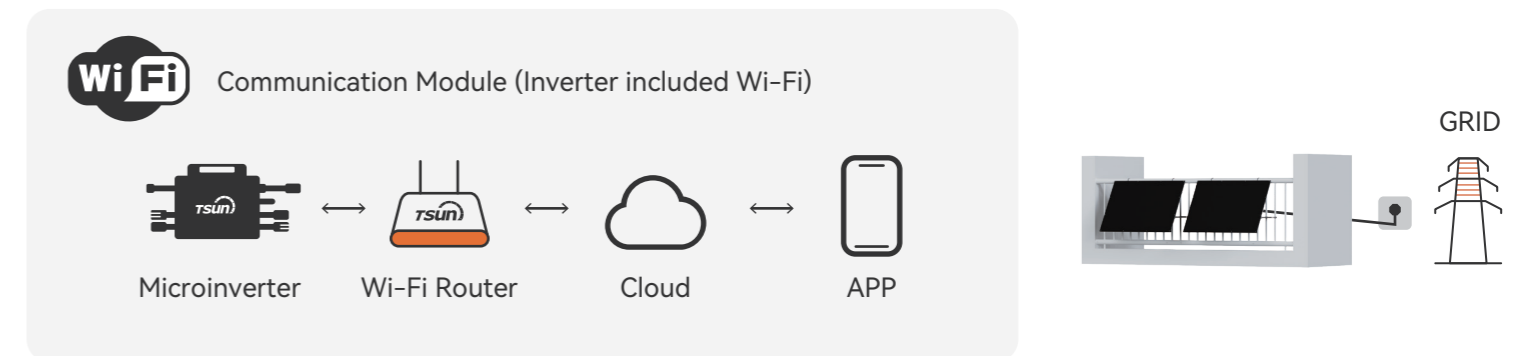

Talent Home is an **energy monitoring mobile application software**.

Users can use Talent Home to monitor the real-time operation of the entire pv power generation system.

Monitor Generation Data of Solar Plant

One-button to Connect Network

Power Generation Statistics

Module-level Monitoring System

Fast Network Configuration